

PWA_(M)D-3W&PWB_(M)D-3W Series 3W, WIDE INPUT, ISOLATED & REGULATED DUAL/SINGLE OUTPUT DC-DC CONVERTER



RoHS

FEATURES

- 4:1 wide input voltage range
- Operating temperature: -40°C to +85°C
- 1500VDC isolation
- Short circuit protection (automatic recovery)
- Internal SMD construction
- UL94-V0 package
- No external component required
- Industry standard pinout
- Five sided metal shielding (PWA/B_MD)
- MTBF>1,000,000 hours
- RoHS compliance

APPLICATIONS


The PWA_(M)D-3W & PWB_(M)D-3W series are specially designed for applications where a wide range input voltage power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is wide range (voltage range \leq 4:1);
- 2) Where isolation is necessary between input and output (isolation \leq 1500VDC);
- 3) Where the regulation of the output voltage and the output ripple noise are demanded.

MODEL SELECTION

PWB2412MD-3W

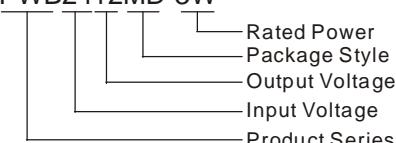

MORNSUN Science & Technology co.,Ltd.

Address: 2th floor 6th building, Huangzhou Industrial District, Guangzhou, China
Tel: 86-20-38601850
Fax: 86-20-38601272
[Http://www.mornsun-power.com](http://www.mornsun-power.com)

PRODUCT PROGRAM

Part Number	Input			Output		Efficiency (% , Typ.)		
	Voltage (VDC)		No-load (mA)(typ)	Voltage (VDC)	Current (mA)			
	Nominal	Range						
PWA2405(M)D-3W	24	9.0-36	40	16	±5	±300	±30	76
PWA2412(M)D-3W					±12	±125	±12	80
PWA2415(M)D-3W					±15	±100	±10	80
PWB2403(M)D-3W					3.3	909	91	74
PWB2405(M)D-3W					5	600	60	76
PWB2412(M)D-3W					12	250	25	80
PWB2415(M)D-3W					15	200	20	80
PWA4805(M)D-3W	48	18-72	80	8	±5	±300	±30	76
PWA4812(M)D-3W					±12	±125	±12	80
PWA4815(M)D-3W					±15	±100	±10	80
PWB4803(M)D-3W					3.3	909	91	74
PWB4805(M)D-3W					5	600	60	78
PWB4812(M)D-3W					12	250	25	80
PWB4815(M)D-3W					15	200	20	80

* Input voltage over it may cause permanent damage to the device.

COMMON SPECIFICATIONS

Item	Test conditions	Min.	Typ.	Max.	Units
Storage humidity				95	%
Operating temperature		-40		85	
Storage temperature		-55		125	
Temp. rise at full load			15		
Lead temperature	1.5mm from case for 10 seconds			300	
Cooling	Free Air Convection				
Short circuit protection	D: Plastic (UL94-V0); MD: Steel, nickel plated				
Case material	Continuous, automatic recovery				
MTBF		1000			K hours
Weight			15		g

ISOLATION SPECIFICATIONS

Item	Test conditions	Min.	Typ.	Max.	Units
Isolation voltage	Tested for 1 minute and 1 mA max	1500			VDC
Isolation resistance	Test at 500VDC	1000			MΩ
Isolation capacitance			100		pF


OUTPUT SPECIFICATIONS

Item	Test conditions	Min.	Typ.	Max	Units
Output power	Refer to products program	0.3		3	W
Positive voltage accuracy	Refer to recommended circuit		± 1	± 3	%
Negative voltage accuracy	Refer to recommended circuit		± 3	± 5	
Load regulation	From 10% to 100% load		± 0.5	$\pm 1^*$	
Line regulation	Input voltage from low to high		± 0.2	± 0.5	
Temperature drift (Vout)	Refer to recommended circuit			± 0.03	%/°C
Ripple & Noise **	20MHz Bandwidth		75	150	mVp-p
Switching frequency	100% load, input voltage range		300		KHz

*Dual output models unbalanced load: $\pm 5\%$.

**Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

TYPICAL CHARACTERISTICS

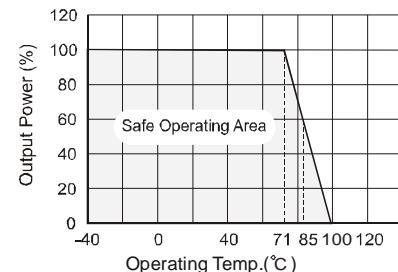

APPLICATION NOTE

1) Requirement on output load

In order to ensure the product operate efficiently and reliably, in addition to a max load (namely full load), a minimum load is specified for this kind of DC/DC converter. Make sure the specified range of input voltage is not exceeded, the minimum output load no less than 10% load. If the actual load is less than the specified minimum load, the output ripple may increase sharply while its efficiency and reliability will reduce greatly. If the actual output power is very small, please add an appropriate resistor as extra loading, or contact our company for other lower output power products.

2) Recommended Circuit


All the PWA_(M)D-3W & PWB_(M)D-3W Series have been tested according to the following recommended testing circuit before leaving factory. This series should be tested under load (see Figure 1).

If you want to further decrease the input/output ripple, you can increase capacitance properly or choose capacitors with low ESR. However, the capacitance should not be too high, or may cause start-up problem. If you want to use the products in high EMI, please choose our metal packaged products (PWA_MD-3W&PWB_MD-3W).


Generally: Cin: 24V&48V 10μF~47μF

Cout: 10μF/100mA

RECOMMENDED CIRCUIT

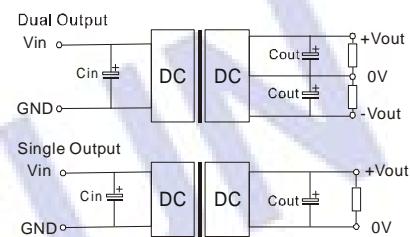

(Figure 1)

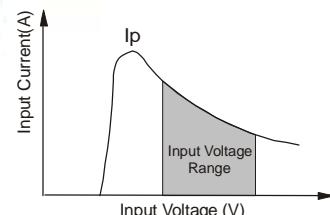

(Figure 2)

3) Input current

While using unstable power source, please ensure the output voltage and ripple voltage do not exceed indexes of the converter. The preceding power source must be able to provide for converter sufficient starting current I_p (Figure 2).



General: $I_p \leq 1.4 \cdot I_{in\max}$

4) No parallel connection or plug and play

Output External Capacitor Table (Table 1)

Single Vout (VDC)	Cout (uF)	Dual Vout (VDC)	Cout (uF)
3.3	2200	± 5	680
5	1000	± 12	330
12	470	± 15	220
15	330	-	-

OUTLINE DIMENSIONS & FOOTPRINT DETAILS

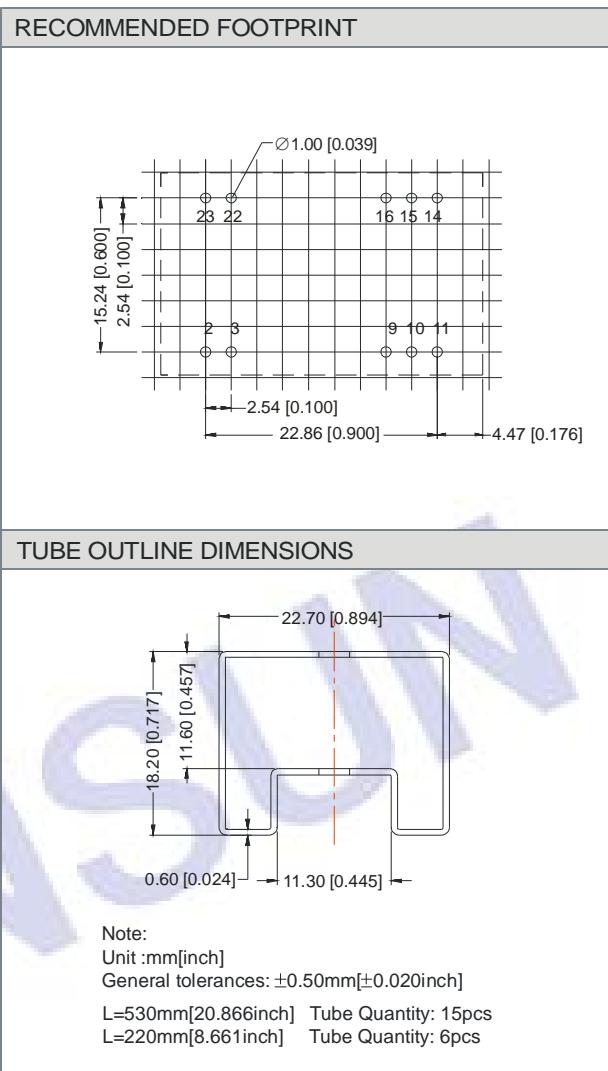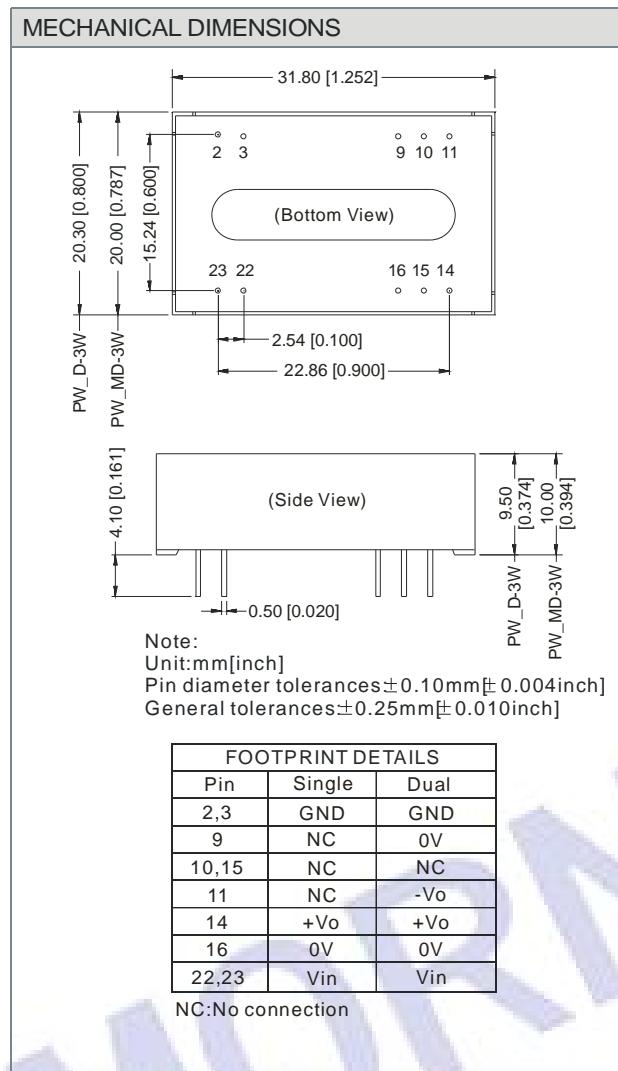

Note:

1. The load shouldn't be less than 10%, otherwise ripple will increase dramatically.
2. Operation under 10% load will not damage the converter; However, they may not meet all specification listed.
3. All specifications measured at $T_a=25^\circ\text{C}$, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
4. In this datasheet, all the test methods of indications are based on corporate standards.
5. Only typical models listed, other models may be different, please contact our technical person for more details.