MORNSUN®

WRE P-3W & WRF P-3W Series

3W, WIDE INPUT, ISOLATED & REGULATED SINGLE/DUAL OUTPUT DC-DC CONVERTER





Patent Protection RoHS

FEATURES

- DIP package
- Efficiency up to 80%
- Operating temperature: -40°C ~ +85°C
- 3KVDC isolation
- Short circuit protection(automatic recovery)
- No external component required
- Internal SMD construction
- Industry standard pinout
- MTBF>1,000,000 hours
- UL94-V0 Package
- RoHS Compliance

APPLICATIONS


The WRE_P-3W & WRF_P-3W series are specially designed for applications where a wide range input voltage power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is wide range (voltage range≤2:1);
- 2) Where isolation is necessary between input and output(Isolation Voltage≤3000VDC);
- 3) Where the regulation of the output voltage and the output ripple noise are demanded.

	Input			Output								
Part Number	Voltage (VDC)			Voltage	Current (mA)		Efficiency (%, Typ.)					
Number	Nominal	Range	Max.*	(VDC)	Max.	Min.	(70, Typ.)					
WRE1205P-3W				±5	±300	±30	74					
WRE1212P-3W				±12	±125	±12	78					
WRE1215P-3W		9-18	22	±15	±100	±10	79					
WRF1205P-3W	40			5	600	60	74					
WRF1209P-3W	12			9	333	33	76					
WRF1212P-3W				12	250	25	78					
WRF1215P-3W				15	200	20	77					
WRF1224P-3W				24	125	12	80					
WRE2405P-3W	1			±5	±300	±30	77					
WRE2409P-3W		24 18-36				±9	±167	±16	78			
WRE2412P-3W			40	±12	±125	±12	79					
WRE2415P-3W	0.4			±15	±100	±10	80					
WRF2405P-3W	24		10-30	10-30	10-30	10-30	10-30	40	5	600	60	77
WRF2409P-3W				9	333	33	78					
WRF2412P-3W							12	250	25	79		
WRF2415P-3W				15	200	20	80					
WRF4805P-3W		48 36-72	2 80	5	600	60	77					
WRF4812P-3W	48 36-			12	250	25	79					
WRF4815P-3W	1			15	200	20	80					

APPLICATIONS



MORNSUN Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui development center, Science Ave., Guangzhou Science City, Luogang district, Guangzhou, P.R. China.

Tel: 86-20-28203030 Fax:86-20-28203068

Http://www.mornsun-power.com


ISOLATION SPECIFICATIONS					
Item	Test Conditions	Min.	Тур.	Max.	Units
Isolation voltage	Tested for 1 minute and 1mA max	3000			VDC
Isolation resistance	Test at 500VDC	1000			ΜΩ

OUTPUT SPECIF	ICATIONS				
Item	Test Conditions	Min.	Тур.	Max.	Units
Storage humidity				95	%
Operating temperature		-40		85	
Storage temperature		-55		125	°C
Temp. rise at full load			15		
Lead temperature	1.5mm from case for 10 seconds			300	
Cooling		Free air convection			
Short circuit protection		Continuous, automatic recovery			
Case material		Plastic (UL94-V0)			
MTBF		1000			K hours
Weight			17		g

COMMON SPECIFICATIONS						
Item	Test Conditions	Min.	Тур.	Max.	Units	
Output power	See above products program	0.3		3	W	
Positive voltage accuracy	Refer to recommended circuit		±1	±3		
Negative voltage accuracy	Refer to recommended circuit		±3	±5	%	
Load regulation	From 10% to 100% load		±0.5	±1*	/6	
Line regulation(at full load)	Input voltage from low to high		±0.2	±0.5		
Temperature Drift(Vout)	Refer to recommended circuit			±0.03	%/°C	
Ripple & Noise **	20MHz Bandwidth		50	100	mVp-p	
Switching frequency	100% load, input voltage range		300		KHz	

^{*} Dual output models unbalanced load: ±5%.

TYPICAL CHARECTERISTICS



APPLICATION NOTE

1) Requirement On Output Load

In order to ensure the product operate efficiently and reliably, in addition to a max load (namely full load), a minimum load is specified for this kind of DC/DC converter. Make sure the specified range of input voltage is not exceeded, the minimum output load *no less than 10% load!* If the actual load is less than the specified minimum load, the output ripple may increase sharply while its efficiency and reliability will reduce greatly. If the actual output power is very small, please add an appropriate resistor as extra loading, or contact our company for other lower output power products.

2) Recommended Circuit

All the WRE_P-3W & WRF_P-3W series have been tested according to the following recommended testing circuit before leaving factory. This series should be tested under load. Never be tested under no load (see Figure 1).

If you want to further decrease the input/output ripple, you can increase capacitance properly or choose capacitors with low ESR. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).

General: Cin: 12V 100µF

24V&48V 10μF-47μF

Cout: 10µF/100mA


3) Input Current

When it is used in unregulated power supply, be sure that the fluctuating range of the power supply and the rippled voltage do not exceed the module standard. Input current of power supply should afford the startup current of this kind of DC/DC module. (Figure 2)


General: Ip ≤1.4*lin-max

4) No parallel connection or plug and play

RECOMMENDED CIRCUIT



(Figure 1)




(Figure 2)


Output External Capacitor Table (Table 1)

Cutput External Capacitor Table (Table 1)					
Single Vout	Cout	Dual Vout	Cout		
(VDC)	(uF)	(VDC)	(uF)		
5	1000	±5	680		
9	680	±9	470		
12	470	±12	330		
15	330	±15	220		
24	220	-	-		

^{**}Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

OUTLINE DIMENSIONS & FOOTPRINT DETAILS

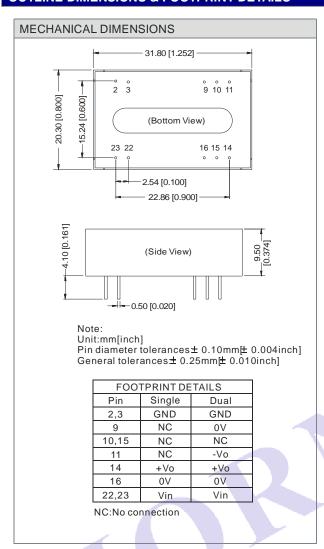

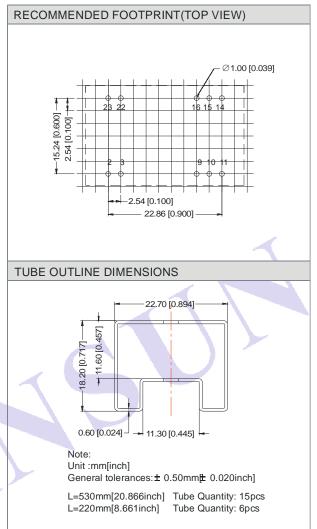

Note:

- 1. The load shouldn't be less than 10%, otherwise ripple will increase dramatically.
- 2. Operation under 10% load will not damage the converter; However, they may not meet all specification listed.
- 3. All specifications measured at Ta=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
- 4. In this datasheet, all the test methods of indications are based on corporate standards.
- 5. Only typical models listed, other models may be different, please contact our technical person for more details.