

20W,Ultra wide input, isolated & regulated single output , DIP package, DC-DC converter



## FEATURES

- Ultra wide input voltage range (4:1)
- High efficiency up to 89%
- No-load power consumption as low as 0.12W
- Isolation voltage :3K VDC
- Input under-voltage protection, output short circuit, over-voltage, Over-current protection
- Operating temperature range: -40°C to +85°C
- Meet CISPR32/EN55032 CLASS A
- Reverse voltage protection available with A2S(Chassis mounting) or A4S(35mm DIN-Rail mounting)
- IEC60950, UL60950, EN60950 approval
- International standard pin-out

Patent Protection

URF\_LP-20WR3 series are isolated 20W DC-DC products with 4:1 input voltage. They feature efficiency up to 89%, 3000VDC isolation, operating temperature of -40 °C to +85 °C , Input under-voltage protection, output short circuit protection, over-voltage protection, over-current protection and EMI meets CISPR32/EN55032 CLASS A, which make them widely applied in power industry, data transmission device, battery power supply device, tele-communication device, distributed power supply system, remote control system, industrial robot system etc. And extension package A2S and A4S also enable them with reverse voltage protection.

## Selection Guide

Certification	Part No. <sup>①</sup>	Input Voltage (VDC)		Output		Efficiency <sup>③</sup> (%,Min.,Typ.) @ Full Load	Max. Capacitive Load(μF)
		Nominal (Range)	Max. <sup>②</sup>	Output Voltage (VDC)	Output Current (mA) (Max./Min.)		
UL/CE/CB	URF2403LP-20WR3	24 (9-36)	40	3.3	5000/0	84/86	10000
	URF2405LP-20WR3			5	4000/0	87/89	10000
	URF2409LP-20WR3			9	2222/0	86/88	4700
	URF2412LP-20WR3			12	1667/0	86/88	1600
	URF2415LP-20WR3			15	1334/0	87/89	1000
	URF2424LP-20WR3			24	833/0	87/89	500
	URF4803LP-20WR3	48 (18-75)	80	3.3	5000/0	84/86	10000
	URF4805LP-20WR3			5	4000/0	86/88	10000
	URF4812LP-20WR3			12	1667/0	86/88	1600
	URF4815LP-20WR3			15	1334/0	87/89	1000
	URF4824LP-20WR3			24	833/0	87/89	500

Notes:

① product model with a suffix of "A2S" means chassis mounting and that with a suffix of "A4S" indicates DIN-Rail mounting (e.g. URF2405LP-20WR3A2S means chassis mounting; URF2405LP-20WR3A4S means DIN-Rail mounting);

②Absolute maximum rating without damage on the converter, but it isn't recommended;

③Efficiency is measured In nominal input voltage and rated output load;A2S (wiring) and A4S (rail) Model due to input reverse polarity protection, minimum efficiency greater than Min.-2 is qualified.

## Input Specifications

Item	Operating Conditions			Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	24VDC input	3.3V output	--	799/40	819/45	--	mA
		5V output	--	936/40	958/45	--	
		Other output	--	947/9	969/12	--	
	48VDC input	3.3V output	--	400/20	410/25	--	
		5V output	--	473/20	485/25	--	
		Other output	--	473/5	485/8	--	
Reflected Ripple Current	24VDC input			--	30	--	
	48VDC input			--	30	--	

Surge Voltage (1sec. max.)	24VDC input	-0.7	--	50	VDC
	48VDC input	-0.7	--	100	
Starting Voltage	24VDC input	--	--	9	
	48VDC input	--	--	18	
Input Under-voltage Protection	24VDC input	5.5	6.5	--	
	48VDC input <sup>①</sup>	12.0	15.5	--	
Starting Time	Nominal input & constant resistance load		--	10	--
Input Filter	Pi filter				
Hot Plug	Unavailable				
Ctrl*	Module switch on	Ctrl suspended or connected to TTL high level (3.5-12VDC)			
	Module switch off	Ctrl pin connected to GND or low level (0-1.2VDC)			
	Input current when switched off	--	4	7	mA

Note: \*The voltage of Ctrl pin is relative to input pin GND.

## Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	0%-100% load	--	$\pm 1$	$\pm 3$	%
Line Regulation	Full load, the input voltage is from low voltage to high voltage	--	$\pm 0.2$	$\pm 0.5$	
Load Regulation	0%-100% load	--	$\pm 0.5$	$\pm 1$	
Transient Recovery Time		--	300	500	$\mu$ s
Transient Response Deviation	25% load step change, Nominal input		$\pm 5$	$\pm 8$	%
	3.3V, 5V output	--	$\pm 3$	$\pm 5$	
Temperature Coefficient	Full load	--	--	$\pm 0.03$	$^{\circ}\text{C}$
Ripple & Noise*	20MHz bandwidth, 5%-100% load	--	50	100	mV p-p
Over-voltage Protection		110	--	160	$\%V_o$
Output Voltage Regulation Trim	Input voltage range	--	$\pm 10$	--	$\%V_o$
Over-current Protection		110	--	190	$\%I_o$
Short circuit Protection	Hiccup, continuous, self-recovery				

Note: \*Ripple and noise are measured by "parallel cable" method, please see DC-DC Converter Application Notes for specific operation.

0%-5% load ripple&Noise is no more than 5% $V_o$ .

## General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Insulation Voltage	Input-output, with the test time of 1 minute and the leak current lower than 1mA	3000	--	--	VDC
Insulation Resistance	Input-output, insulation voltage 500VDC	1000	--	--	M $\Omega$
Isolation Capacitance	Input-output, 100KHz/0.1V	--	500	--	pF
Operating Temperature	see Fig. 1	-40	--	+85	$^{\circ}\text{C}$
Storage Temperature		-55	--	+125	
Storage Humidity	Non-condensing	5	--	95	%RH
Pin Welding Resistance Temperature	Welding spot is 1.5mm away from the casing, 10 seconds	--	--	+300	$^{\circ}\text{C}$
Vibration		10-55Hz, 10G, 30 Min. along X, Y and Z			
Switching Frequency *	PWM mode	--	270	--	KHz
MTBF	MIL-HDBK-217F@25 $^{\circ}\text{C}$	1000	--	--	K hours

Note: \*This series of products using reduced frequency technology, the switching frequency is test value of full load. When the load is reduced to below 50%, the switching frequency decreases with decreasing load.

### Physical Specifications

Casing Material		Black flame-retardant and heat-resistant plastic (UL94 V-0)
Package Dimensions	Horizontal package	51.50*26.50*12.00 mm
	A2S wiring package	76.00*31.50*21.20 mm
	A4S rail package	76.00*31.50*25.80 mm
Weight	Horizontal package/A2S wiring package/A4S rail package	24g/46g/66g (Typ.)
Cooling method		Free air convection

### EMC Specifications

EMI	CE	CISPR32/EN55032	CLASS A (Bare component)/ CLASS B (see Fig.3-② for recommended circuit)
	RE	CISPR32/EN55032	CLASS A (Bare component)/ CLASS B (see Fig.3-② for recommended circuit)
EMS	ESD	IEC/EN61000-4-2	Contact $\pm 4\text{KV}$ perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 2\text{KV}$ (see Fig.3-① for recommended circuit) perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line $\pm 2\text{KV}$ (see Fig.3-① for recommended circuit) perf. Criteria B
	CS	IEC/EN61000-4-6	3 Vr.m.s perf. Criteria A
	Immunities of voltage dip, drop and short interruption	IEC/EN61000-4-29	0%,70% perf. Criteria B

### Product Characteristic Curve





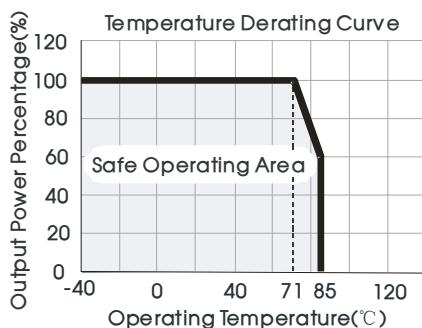


Fig. 1

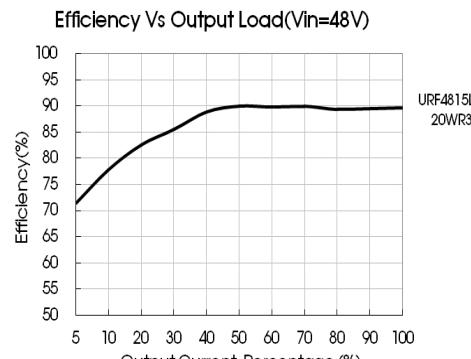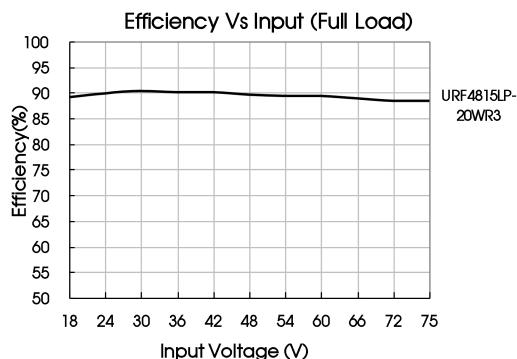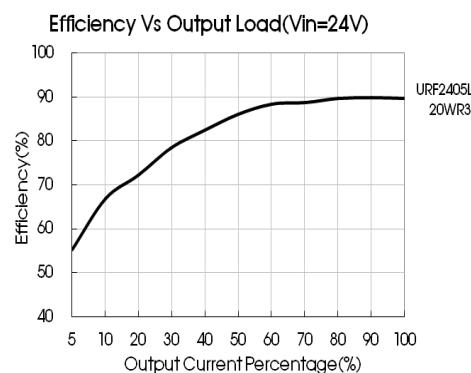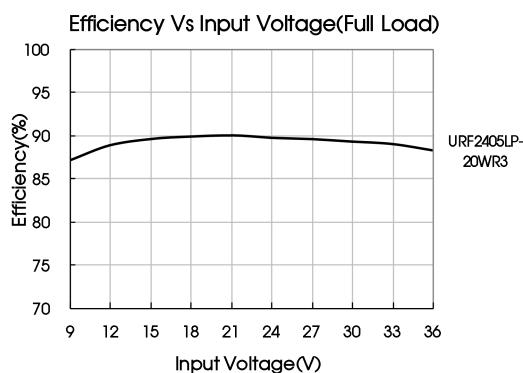

## Design Reference

### 1. Typical application

All the DC/DC converters of this series are tested according to the recommended circuit (see Fig. 2) before delivery. If it is required to further reduce input and output ripple, properly increase the input & output of additional capacitors Cin and Cout or select capacitors of low equivalent impedance provided that the capacitance is no larger than the max. capacitive load of the product.

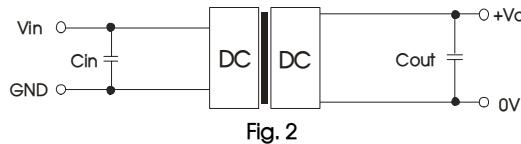


Fig. 2

Vin(VDC)	Cout(μF)	Cin(μF)
3.3/5	470	100
9/12/15	220	
24	100	

### 2. EMC solution-recommended circuit

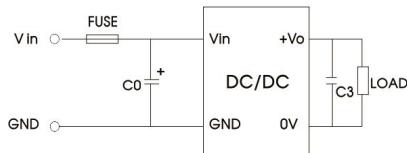


Fig. 3-①

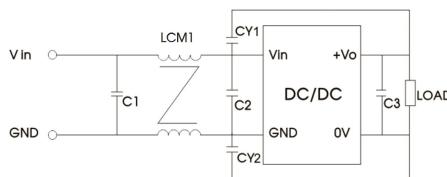



Fig. 3-②

#### Parameter description

Model	Vin:24V	Vin:48V
FUSE	Choose according to actual input current	
C0	1000μF/50V	680μF/100V
C1/C2	1μF/50V	1μF/100V
C3	Refer to the Cout in Fig.2	
LCM1	6.8mH	
CY1	1nF/3KV	
CY2	1nF/3KV	

Notes: Part ① in the Fig. 3 is used for EMS test and part ② for EMI filtering; selected based on needs.

### 3. Application of Trim and calculation of Trim resistance

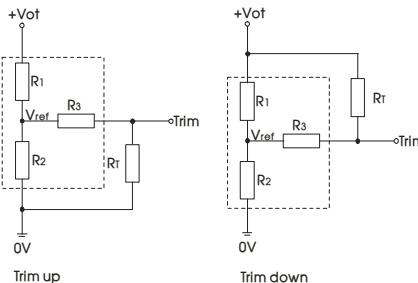

Applied circuits of Trim (Part in broken line is the interior of models)

#### Calculation formula of Trim resistance:

$$\text{up: } R_t = \frac{\alpha R_2}{R_2 - \alpha} - R_3 \quad \alpha = \frac{V_{ref}}{V_{o'} - V_{ref}} \cdot R_1$$

$$\text{down: } R_t = \frac{\alpha R_1}{R_1 - \alpha} - R_3 \quad \alpha = \frac{V_{o'} - V_{ref}}{V_{ref}} \cdot R_2$$



$R_t$  is Trim resistance  
 $\alpha$  is a self-defined parameter, with no real meaning.

Vout(V)	R1(KΩ)	R2(KΩ)	R3(KΩ)	Vref(V)
3.3	4.801	2.87	12.4	1.25
5	2.883	2.87	10	2.5
9	7.500	2.87	15	2.5
12	11.000	2.87	15	2.5
15	14.494	2.87	15	2.5
24	24.872	2.87	17.8	2.5

### 4. It is not allowed to connect modules output in parallel to enlarge the power


### 5. For more information please find DC-DC converter application notes on [www.mornsun-power.com](http://www.mornsun-power.com)

Dimensions and Recommended Layout

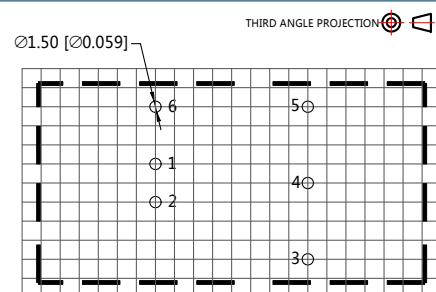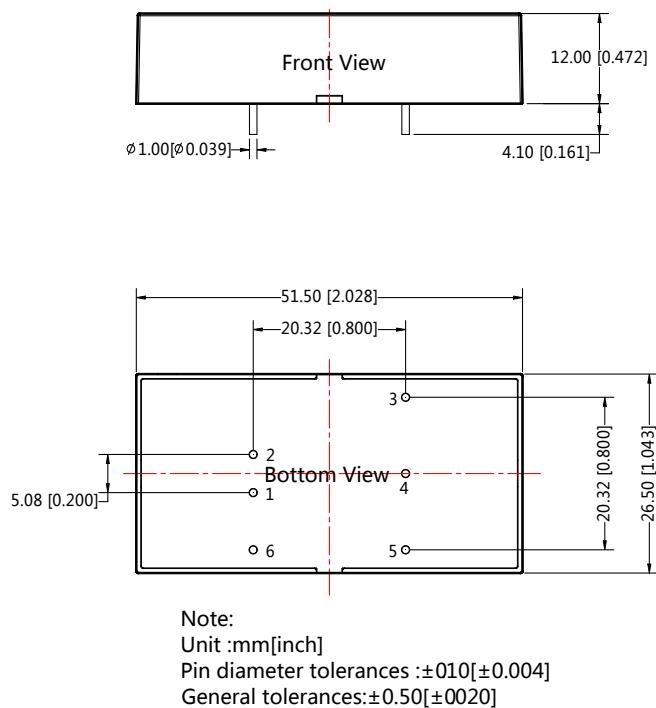

Pin-Out	
Pin	Function
1	GND
2	Vin
3	+Vo
4	Trim
5	0V
6	Ctrl

URF\_LP-20WR3A2S Dimensions

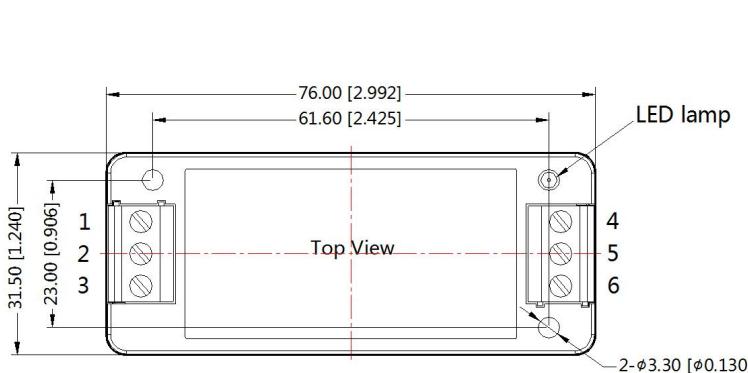


Pin-Out						
Pin	1	2	3	4	5	6
Function	Ctrl	GND	Vin	0V	Trim	+Vo


**Note:**  
Unit: mm[inch]  
Wire range: 24-12 AWG  
Tightening torque: Max 0.4 N·m  
General tolerances: ±0.50[±0.020]

URF\_LP-20WR3A4S Dimensions

THIRD ANGLE PROJECTION

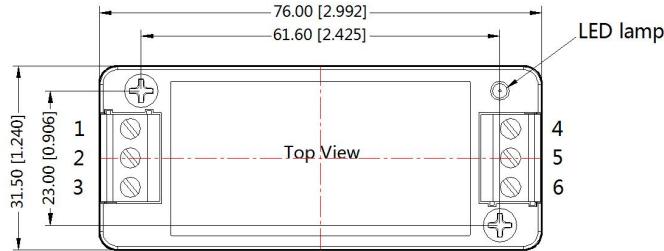

Pin-Out						
Pin	1	2	3	4	5	6
Function	Ctrl	GND	Vin	0V	Trim	+Vo

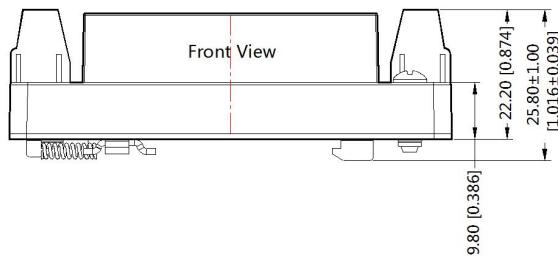

Note:

Unit: mm[inch]

Mounting rail: TS35

Wire range: 24-12 AWG

Tightening torque: Max 0.4 N·m

General tolerances: ±0.50[±0.020]

Note:

1. Packing information please refer to Product Packing Information which can be downloaded from [www.mornsun-power.com](http://www.mornsun-power.com). The Packing bag number of Horizontal package : 58210039, the Packing bag number of A2S/ A4S package:58220022;
2. The maximum capacitive load offered were tested at input voltage range and full load;
3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^\circ\text{C}$ , humidity<75%RH with nominal input voltage and rated output load;
4. All index testing methods in this datasheet are based on Company's corporate standards;
5. We can provide product customization service, please contact our technicians directly for specific information;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

**Mornsun Guangzhou Science & Technology Co., Ltd.**

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China  
Tel: 86-20-38601850-8801 Fax: 86-20-38601272 E-mail: [info@mornsun.cn](mailto:info@mornsun.cn)