









Type	Profile				Description	Manual App Control	
	Fixture ID	Model / Name	Icon	Fixture mode			
DALI	26254***	DALI Lin* Broadcast		DALI/BC/Dim{OHI,H WTemp,Daylight}	DALI Broadcast. Linear dimming curve.	Dimmer: BC	
	31898**	DALI Lin* BC (No LX sensor)		DALI/BC/Dim{OHI,H WTemp}	DALI Broadcast. Linear dimming curve. Internal Light sensor is disabled.	Dimmer: BC	
	26255	DALI Log Broadcast		DALI/BC/Dim{OHI,H WTemp,Daylight}	DALI Broadcast. Logarithmic dimming curve.	Dimmer: BC	
	26268	DALI Lin* (4xGroup)		DALI/4ch/Dim,Dim,Dim,Dim{OHI,HWTemp,Daylight}	DALI 4xGroup. Linear dimming curve. Controls DALI Groups.	Dimmer 1: G0 Dimmer 2: G1 Dimmer 3: G2 Dimmer 4: G3	
	26269	DALI Lin* (6xGroup)		DALI/Elements{OHI,H WTemp,Daylight}	DALI 6xGroup. Linear dimming curve. Controls DALI Groups.	GROUP#0: G0 GROUP#1: G1 GROUP#2: G2 GROUP#3: G3 GROUP#4: G4 GROUP#5: G5	
	26257	DALI Lin* BC+Ext. Sensors		DALI/BC/Dim{OHI,H WTemp,Presence,Daylight}	DALI Broadcast. Linear dimming curve. External DALI2 motion and light sensor connected to the DALI bus will appear as a Casambi sensor in the App. The internal light sensor of the node is disabled.	Dimmer: BC	
	26256	DALI Lin* BC +Ext. Presence		DALI/BC/DIM{OHI,H WTemp,Presence,Daylight}	DALI Broadcast. Linear dimming curve. External DALI2 motion sensor connected to the DALI bus will appear as a Casambi sensor in the App.	Dimmer: BC	
	26271	DALI Lin* DT6 TW Warm-Cool SA +Ext. Presence		DALI/2ch/Dim,Vertical{OHI,HWTemp,Presence,Daylight}	DALI DT6 Tunable white. Generic Warm / Cool slider (no CCT value data). Linear dimming curve. Automatic DALI addressing. A compatible external DALI2 motion sensor connected to the DALI bus will appear as a Casambi sensor in the App. Warm: address A0 Cool: address A1	Dimmer: A0+A1 Colour temperature: Warm/cool mixer	
	26270	DALI Lin* DT6 TW 3-5K SA		DALI/2ch/Dim,TW{OHI,HWTemp,Daylight}	DALI DT6 Tunable white. Linear dimming curve. Automatic DALI addressing. Warm: address A0 Cool: address A1	Dimmer: A0+A1 Colour temperature: Warm (3000K) / cool (5000k) mixer	
26272	DALI Lin* RGB SA		DALI/3ch/Dim,RGB{OHI,HWTemp,Daylight}	DALI DT6 RGB. Linear dimming curve. Automatic DALI addressing. Red: address A0 Green: address A1 Blue: address A2	Dimmer: Red/green/blue/ dimming control Colour: Red/green/blue mixer Colour saturation: Grade of purity of the current color Palette: Red/green/blue mix (horizontal) + saturation (vertical) Saved colours: Up to 10		




26273	DALI Lin* DT6 RGB/W SA		DALI/4ch/Dim,RGB/White{OHI,HWTmp,Daylight}	DALI DT6 RGB/W. Linear dimming curve. White/Colour balance control. Automatic DALI addressing. LOUT switches on when dimming level >0 Red: address A0 Green: address A1 Blue: address A2 White: address A3	Dimmer: Red/green/blue/white dimming control White/Colour: Balance between the white channel and the RGB mix Colour: Red/green/blue mixer Colour saturation: Grade of purity of the current color (doesn't affect the white channel) Palette: Red/green/blue mix (horizontal) + saturation (vertical) Saved colours: Up to 10	
31712	DALI Lin* DT6 RGB/W+dW		DALI /4ch/Dim,RGB/White {OHI,HWTmp,Daylight}	DALI DT6 RGB/W with additional White2 channel. Linear dimming curve. White1/Colour balance slider + Dedicated slider for additional White2 channel. White2 channel control won't be affected by top Dimmer slider, but it's level will be overwritten when dimmed by sliding on the App icon. Automatic DALI addressing. Red: address A0 Green: address A1 Blue: address A2 White1 (White/colour slider): address A3 White2 (semi-independent slider): address A4	Dimmer: Red/green/blue/white 1 dimming control (doesn't affect white2 channel) White1/Colour: Balance between the white1 channel and the RGB mix Colour: Red/green/blue mixer Colour saturation: Grade of purity of the current color (doesn't affect white1 or white2 channel) Palette: Red/green/blue mix (horizontal) + saturation (vertical) Saved colours: Up to 10 White2: White 2 channel dimming control	
26274	DALI Lin* DT6 RGB/W+W SA		DALI/5ch/Dim,RGB/W+W [Evolution] {OHI,HWTmp,Daylight}	DALI DT6 RGB/W with additional White2 channel. Linear dimming curve. White/Colour balance slider + Dedicated slider for additional White channel. Automatic DALI addressing. Red: address A0 Green: address A1 Blue: address A2 White (White/colour slider): address A3 White (independent slider): address A4	Dimmer: Red/green/blue/2whites dimming control White: white channel dimming control (A4) White/Colour: Balance between the white channel (A3) and the RGB mix Colour: Red/green/blue mixer Colour saturation: Grade of purity of the current color (doesn't affect the white channel) Palette: Red/green/blue mix (horizontal) + saturation (vertical) Saved colours: Up to 10	
26246	DALI Lin* DT6 1xDIM SA		DALI/Element{OHI,HWTmp,Daylight}	DALI DT6 1xDimmer. Linear dimming curve. Automatic DALI addressing.	Dimmer: BC	
26247	DALI Lin* DT6 2xDIM SA		DALI/Elements{OHI,HWTmp,Daylight}	DALI DT6 2xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	Dimmer 1: A0 Dimmer 2: A1	
26248	DALI Lin* DT6 3xDIM SA		DALI/Elements{OHI,HWTmp,Daylight}	DALI DT6 3xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	Dimmer 1: A0 Dimmer 2: A1 Dimmer 3: A2	
26249	DALI Lin* DT6 4xDIM SA		DALI/Elements{OHI,HWTmp,Daylight}	DALI DT6 4xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	Dimmer 1: A0 Dimmer 2: A1 Dimmer 3: A2 Dimmer 4: A3	



	26250	DALI Lin* DT6 5xDIM SA		DALI/Elements{OHI,H WTemp}	DALI DT6 5xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	Dimmer 1: A0 Dimmer 2: A1 Dimmer 3: A2 Dimmer 4: A3 Dimmer 5: A4	
	26251	DALI Lin* DT6 6xDIM SA		DALI/Elements{OHI,H WTemp,Daylight}	DALI DT6 6xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	Dimmer 1: A0 Dimmer 2: A1 Dimmer 3: A2 Dimmer 4: A3 Dimmer 5: A4 Dimmer 6: A5	
	26252	DALI Lin* DT6 7xDIM SA		DALI/Elements{OHI,H WTemp,Daylight}	DALI DT6 7xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	Dimmer 1: A0 Dimmer 2: A1 Dimmer 3: A2 Dimmer 4: A3 Dimmer 5: A4 Dimmer 6: A5 Dimmer 7: A6	
	26253	DALI Lin*DT6 8xDIM SA		DALI/Elements{OHI,H WTemp,Daylight}	DALI DT6 8xDimmers. Linear dimming curve. Individual slider levels are overwritten when dimmed by sliding on the App icon. Automatic DALI addressing.	Dimmer 1: A0 Dimmer 2: A1 Dimmer 3: A2 Dimmer 4: A3 Dimmer 5: A4 Dimmer 6: A5 Dimmer 7: A6 Dimmer 8: A7	
DALI DT8	26275	DALI Lin* DT8 TW 3- 5K BC		DALI/DT8/Dim,TW{O HI,HWTemp,Daylight}	DALI DT8 Tunable white. Broadcast. Linear dimming curve.	Dimmer: BC Colour temperature: warm (3000K) / cool (5000K) mixer	
	26276	DALI Lin* DT8 TW 2.7-6K BC		DALI/DT8/Dim,TW{O HI,HWTemp,Daylight}	DALI DT8 Tunable white. Broadcast. Linear dimming curve.	Dimmer: BC Colour temperature: warm (2700K) / cool (6000K) mixer	
	28458	DALI Lin* DT8 TW 2.2-7K BC		DALI/DT8/Dim,TW{O HI,HWTemp,Daylight}	DALI DT8 Tunable white. Broadcast. Linear dimming curve.	Dimmer: BC Colour temperature: warm (2200K) / cool (7000K) mixer	

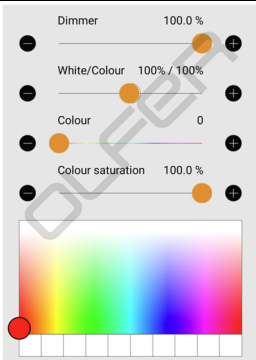

	26277	DALI Lin* DT8 RGB/W BC		DALI/DT8/Dim,RGB/White [Evolution]{OHL,HWT emp,Daylight}	DALI DT8 RGB/W. Broadcast. Linear dimming curve. White/Colour balance slider.	Dimmer: Red/green/blue/white dimming control White/Colour: Balance between the white channel and the RGB mix Colour: Red/green/blue mixer Colour saturation: Grade of purity of the current color (doesn't affect the white channel) Palette: Red/green/blue mix (horizontal) + saturation (vertical) Saved colours: Up to 10 
--	-------	-------------------------------	---	---	---	---

** Default profile starting October 2023

*** Default profile until September 2023

Additional Information

Summary of some terms and abbreviations that have been used throughout the document.

Abbreviation:	Description:
A0, A1, A2, ...	DALI short address.
G0, G1, G2, ...	DALI group address.
BC	Broadcast.
SA	Short Address
Lin*	Optimized linear dimming curve.
Log	Logarithmic dimming curve.



Revision history

Date:	Version:	Description:
25/09/2023	1.0	Initial release.

OLFER